
STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	M004186	108	114

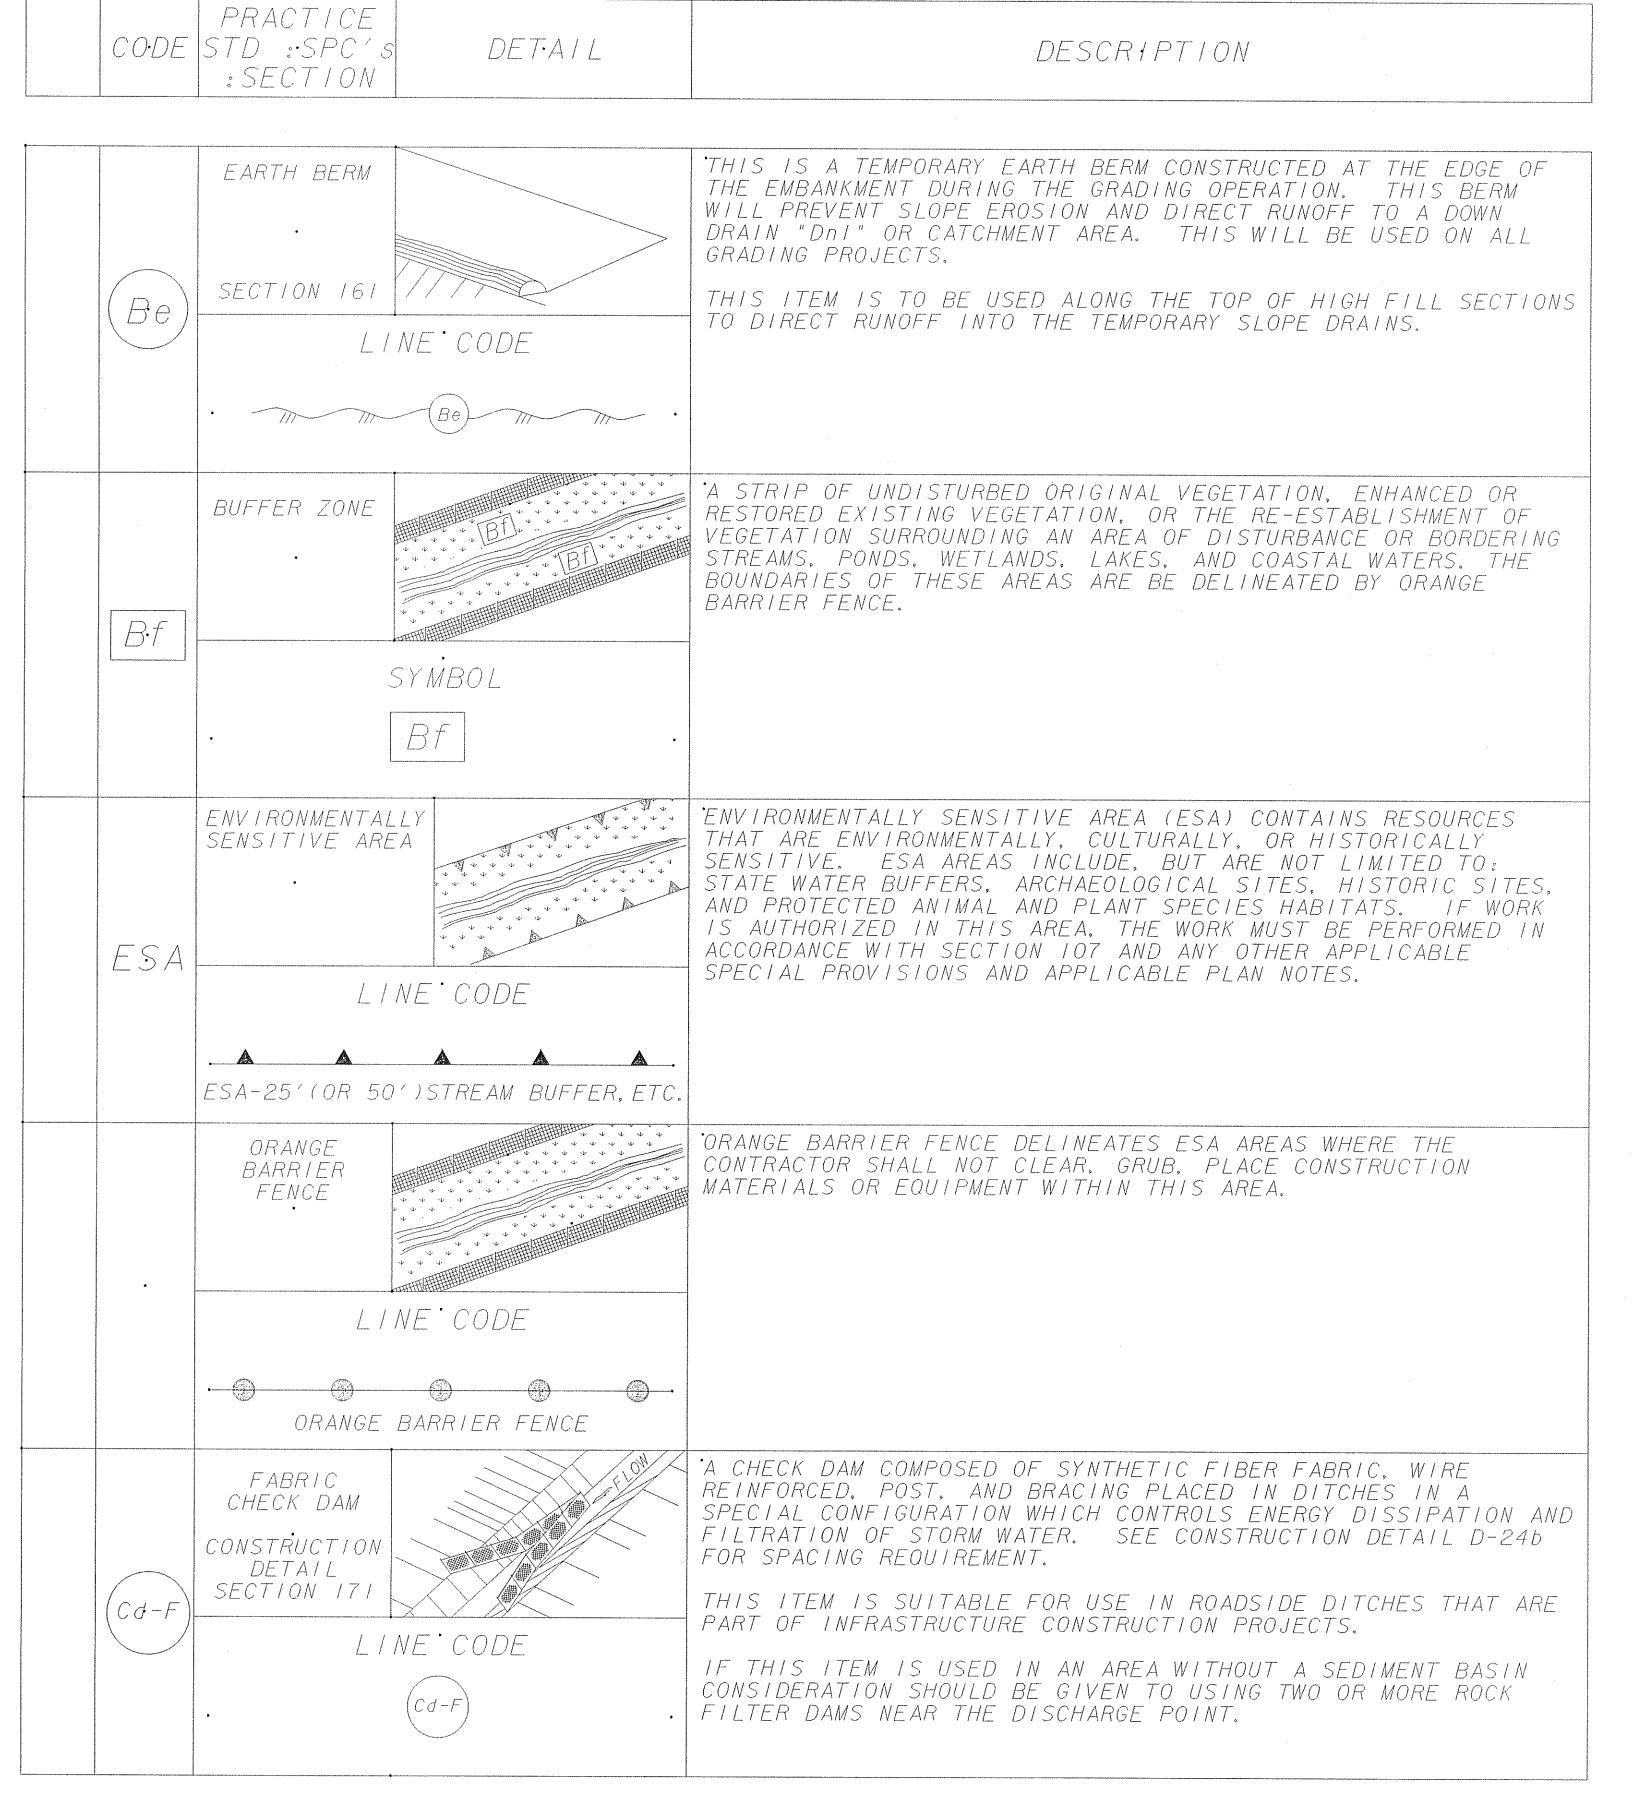

CODE	STD :SPC's :SECTION	DETA / L	DESCRIPTION
(Cd-Hb)		E CODE (1-Hb)	HAYBALE CHECK DAMS ARE RECOMMENDED FOR DRAINAGE AREA L THAN ONE ACRE.
(Cd-S)		CODE .	STONE CHECK DAMS ARE USED IN ROADWAY DITCHES. GEOTEXI UNDERLINER SHALL BE USED WHEN PLACING STONE CHECK DAMS
(Ch + Br)		CODE .	THIS ITEM CONSISTS OF PLACING ONE OR MORE LAYERS OF BITUMINOUS TREATED ROVING ON A PLANTED AREA, IN CHANNELS TO STABILIZE VEGETATION AND PREVENT EROSION. BITUMINOUS TREATED ROVING SHALL BE PLACED TO PROTECT TO DITCH FLOWING TO A DEPTH "Dp" RECOMMENDED BY THE GDOT PROTECTION PROGRAM. ADDITITIONAL EROSION CONTROL MEAS MAY BE REQUIRED.  "Dp" SHALL BE IDENTIFIED IN A TABLE LOCATED ON THE SUM OF QUANTITIES SHEETS
Ch-C		Ch-C)	THIS ITEM CONSISTS OF CONSTRUCTING A 4" THICK CONCRETE CHANNEL. THE CONCRETE SHALL PROTECT THE DITCH FLOWING DEPTH "Dp" RECOMMENDED BY THE GDOT DITCH PROTECTION PROPERTY OF SHALL BE IDENTIFIED IN A TABLE LOCATED ON THE SUM OF QUANTITIES SHEETS

NOTE: 1. DO NOT USE EROSION CONTROL ITEMS IN A FLOWING STREAM OR IN A TIDAL AREA BELOW HIGH TIDE.

PRACT/CE

2. FOR ADDITIONAL INFORMATION ON THE DESIGN
AND APPLICATION OF EROSION CONTROL MEASURES SEE THE GEORGIA SOIL AND WATER CONSERVATION COMMISSION, "MANUAL FOR EROSION AND SEDIMENT CONTROL IN GEORGIA".

11-13-07	DATE	DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA				
REV. Be, ADDED Bf, ESA, OBF AND Ch-F REVISED TITLE BLOCK	REVISION	EROSION CONTROL LEGEND AND UNIFORM CODE SHEET SHEET LOF 6				
REV 0BF REV		NO SCALE JANUARY 2007				
079	<u>&gt;</u>	NUMBER EC-LI 52-001				